

## PCT INTERNATIONAL COOPERATION TREATY

PCT

From the INTERNATIONAL BUREAU

NOTIFICATION OF THE RECORDING  
OF A CHANGE(PCT Rule 92bis.1 and  
Administrative Instructions, Section 422)

To:

FREEHILLS CARTER SMITH & BEADLE  
101 Collins Street  
Melbourne, VIC 3000  
AUSTRALIE

Date of mailing (day/month/year) 06 June 2000 (06.06.00)	<b>IMPORTANT NOTIFICATION</b>
Applicant's or agent's file reference #27564 RNM:ct	
International application No. PCT/AU99/00039	International filing date (day/month/year) 18 January 1999 (18.01.99)

## 1. The following indications appeared on record concerning:

☐ the applicant    ☐ the inventor    ☒ the agent    ☐ the common representative

Name and Address CARTER SMITH & BEADLE 2 Railway Parade P.O. Box 557 Camberwell, Vic 3124 Australia	State of Nationality	State of Residence
	Telephone No. (03) 9882 0599	
	Facsimile No. (03) 9882 9854	
	Teleprinter No.	

## 2. The International Bureau hereby notifies the applicant that the following change has been recorded concerning:

☐ the person    ☒ the name    ☒ the address    ☐ the nationality    ☐ the residence

Name and Address FREEHILLS CARTER SMITH & BEADLE 101 Collins Street Melbourne, VIC 3000 Australia	State of Nationality	State of Residence
	Telephone No. 61 2 9288 1577	
	Facsimile No. 61 3 9288 1567	
	Teleprinter No.	

## 3. Further observations, if necessary:

## 4. A copy of this notification has been sent to:

<input checked="" type="checkbox"/> the receiving Office	<input type="checkbox"/> the designated Offices concerned
<input type="checkbox"/> the International Searching Authority	<input checked="" type="checkbox"/> the elected Offices concerned
<input checked="" type="checkbox"/> the International Preliminary Examining Authority	<input type="checkbox"/> other:

The International Bureau of WIPO 34, chemin des Colombettes 1211 Geneva 20, Switzerland	Authorized officer I. Britel
Facsimile No.: (41-22) 740.14.35	Telephone No.: (41-22) 338.83.38

INTERNATIONAL COOPERATION TREATY

PCT

NOTIFICATION OF ELECTION

(PCT Rule 61.2)

From the INTERNATIONAL BUREAU

To:

United States Patent and Trademark  
Office  
(Box PCT)  
Crystal Plaza 2  
Washington, DC 20231  
ÉTATS-UNIS D'AMÉRIQUE

in its capacity as elected Office

Date of mailing: 29 July 1999 (29.07.99)	
International application No.: PCT/AU99/00039	Applicant's or agent's file reference: #27564 RNM:ct
International filing date: 18 January 1999 (18.01.99)	Priority date: 21 January 1998 (21.01.98)
Applicant: ZIENTEK, Paul et al	

1. The designated Office is hereby notified of its election made:

☒ in the demand filed with the International preliminary Examining Authority on:

23 April 1999 (23.04.99)

☐ in a notice effecting later election filed with the International Bureau on:

2. The election ☒ was

☐ was not

made before the expiration of 19 months from the priority date or, where Rule 32 applies, within the time limit under Rule 32.2(b).

The International Bureau of WIPO 34, chemin des Colombettes 1211 Geneva 20, Switzerland Facsimile No.: (41-22) 740.14.35	Authorized officer:  J. Zahra Telephone No.: (41-22) 338.83.38
---	---

16  
REC'D 24 MAY 2000

WIPO

PCT

Applicant's or agent's file reference 40391514 RNM:DL (#27564)	<b>FOR FURTHER ACTION</b> See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416).	
International application No. <b>PCT/AU99/00039</b>	International filing date (day/month/year) 18 January 1999	Priority Date (day/month/year) 21 January 1998
International Patent Classification (IPC) or national classification and IPC  <b>Int. Cl. <sup>7</sup> B44F 1/12, B41M 3/14, B42D 15/10 // B42D 101:00, 209:00, 217:00</b>		
Applicant <b>SECURENCY PTY LTD et al</b>		

1.	This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.																
2.	This REPORT consists of a total of 3 sheets, including this cover sheet.  <input type="checkbox"/> This report is also accompanied by ANNEXES, i.e., sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).  These annexes consist of a total of sheet(s).																
3.	This report contains indications relating to the following items:  <table border="0"> <tr> <td>I</td> <td><input checked="" type="checkbox"/> Basis of the report</td> </tr> <tr> <td>II</td> <td><input type="checkbox"/> Priority</td> </tr> <tr> <td>III</td> <td><input type="checkbox"/> Non-establishment of opinion with regard to novelty, inventive step and industrial applicability</td> </tr> <tr> <td>IV</td> <td><input type="checkbox"/> Lack of unity of invention</td> </tr> <tr> <td>V</td> <td><input checked="" type="checkbox"/> Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement</td> </tr> <tr> <td>VI</td> <td><input checked="" type="checkbox"/> Certain documents cited</td> </tr> <tr> <td>VII</td> <td><input type="checkbox"/> Certain defects in the international application</td> </tr> <tr> <td>VIII</td> <td><input type="checkbox"/> Certain observations on the international application</td> </tr> </table>	I	<input checked="" type="checkbox"/> Basis of the report	II	<input type="checkbox"/> Priority	III	<input type="checkbox"/> Non-establishment of opinion with regard to novelty, inventive step and industrial applicability	IV	<input type="checkbox"/> Lack of unity of invention	V	<input checked="" type="checkbox"/> Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement	VI	<input checked="" type="checkbox"/> Certain documents cited	VII	<input type="checkbox"/> Certain defects in the international application	VIII	<input type="checkbox"/> Certain observations on the international application
I	<input checked="" type="checkbox"/> Basis of the report																
II	<input type="checkbox"/> Priority																
III	<input type="checkbox"/> Non-establishment of opinion with regard to novelty, inventive step and industrial applicability																
IV	<input type="checkbox"/> Lack of unity of invention																
V	<input checked="" type="checkbox"/> Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement																
VI	<input checked="" type="checkbox"/> Certain documents cited																
VII	<input type="checkbox"/> Certain defects in the international application																
VIII	<input type="checkbox"/> Certain observations on the international application																

Date of submission of the demand 23 April 1999	Date of completion of the report 19 May 2000
Name and mailing address of the IPEA/AU AUSTRALIAN PATENT OFFICE PO BOX 200, WODEN ACT 2606, AUSTRALIA E-mail address: pct@ipaustalia.gov.au Facsimile No. (02) 6285 3929	Authorized Officer  <b>STEPHEN CLARK</b>  Telephone No. (02) 6283 2164

**I. Basis of the report**1. With regard to the **elements** of the international application:\*

- ☒ the international application as originally filed.
- ☐ the description,        pages    , as originally filed,  
   pages    , filed with the demand,  
   pages    , received on    with the letter of
- ☐ the claims,                pages    , as originally filed,  
   pages    , as amended (together with any statement) under Article 19,  
   pages    , filed with the demand,  
   pages    , received on    with the letter of
- ☐ the drawings,            pages    , as originally filed,  
   pages    , filed with the demand,  
   pages    , received on    with the letter of
- ☐ the sequence listing part of the description:  
   pages    , as originally filed  
   pages    , filed with the demand  
   pages    , received on    with the letter of

2. With regard to the **language**, all the elements marked above were available or furnished to this Authority in the language in which the international application was filed, unless otherwise indicated under this item.

These elements were available or furnished to this Authority in the following language which is:

- ☐ the language of a translation furnished for the purposes of international search (under Rule 23.1(b)).
- ☐ the language of publication of the international application (under Rule 48.3(b)).
- ☐ the language of the translation furnished for the purposes of international preliminary examination (under Rules 55.2 and/or 55.3).

3. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, was on the basis of the sequence listing:

- ☐ contained in the international application in written form.
- ☐ filed together with the international application in computer readable form.
- ☐ furnished subsequently to this Authority in written form.
- ☐ furnished subsequently to this Authority in computer readable form.
- ☐ The statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.
- ☐ The statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished

4. ☐ The amendments have resulted in the cancellation of:

- ☐ the description,        pages
- ☐ the claims,                Nos.
- ☐ the drawings,            sheets/fig.

5. ☐ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed, as indicated in the Supplemental Box (Rule 70.2(c)).\*\*

\* Replacement sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to this report since they do not contain amendments (Rules 70.16 and 70.17).

\*\* Any replacement sheet containing such amendments must be referred to under item 1 and annexed to this report

**V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement****1. Statement**

Novelty (N)	Claims 1-37	YES
	Claims	NO
Inventive step (IS)	Claims 1-37	YES
	Claims	NO
Industrial applicability (IA)	Claims 1-37	YES
	Claims	NO

**2. Citations and explanations (Rule 70.7)**

1. AU 87665/82
2. AU 62634/94
3. GB 2268906
4. EP 0655316
5. US 5275870
6. DE 3208204
7. US 5546198 by van der Gracht et al. (13 August 1996)

**NOVELTY (N) Claims 1-37**

The applicant asserts that the term "patterned beam" has a specific meaning in the field of diffractive optics that distinguishes it from other known patterning devices. Assuming this to be the case I must regard the claims as being novel in the light of the above citations, as they appear not to give a "patterned beam" (although they do give a pattern of selected design in a transmitted form to be viewed on a surface to authenticate a security document).

**INVENTIVE STEP (IS) Claims 1-37**

The claims would not be obvious to a person skilled in the art in light of the above citations. Citations 1-6 all disclose security documents with a transparent portion that include an optical projection element that is viewed in transmission mode to authenticate the document. The optical element transforms an incident beam to give a pattern of selected design on a viewing surface that allows the authentication process to be carried out.

The present invention performs the same function but uses an optical device that produces a "patterned beam" (the public company Mems Optical supplies the optical elements and advertises them on their Internet site, citation 7 also discloses this subject matter) to replace the known optical elements. The applicant asserts that neither the Mems Optical Internet site nor citation 7 disclose the use of "patterned beam" devices for security documents and that therefore a person skilled in the art would not have had them as part of their store of common general knowledge to be able to apply them to this invention. Assuming this to be the case I must regard the claims as involving an inventive step.

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/AU 99/00039

<b>A. CLASSIFICATION OF SUBJECT MATTER</b>		
Int Cl <sup>6</sup> : B44F 1/12, B41M 3/14, B42D 15/10 // B42D 101:00, 115:00, 209:00, 217:00		
According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b>		
Minimum documentation searched (classification system followed by classification symbols) B44F 1/12, B41M 3/10, 3/14, B42D 15/10, 101:00, 115:00, 209:00, 217:00, 219:00, 221:00, 223:00, G06K 5/00, 9/00, G07D 7/00		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) WPAT, JAPIO (TRANSPARENT, TRANSLUCENT, CLEAR, TRANSMIT:, SECUR:, DOCUMENT#, BANK:, CHEQUE#, CHECK#, MONEY, WATERMARK:, PATTERN:, IMAG:, VERIF:, AUTHENTIC:, FOLD:, BOND:)		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	AU 87665/82 A (CSIRO) 3 March 1983 See disclosure of invention pages 2-6	1,4-8,13,16,17,20- 22,26,27,29-32,37
Y		2,3,10,11,14,15,19
P,X	AU 44460/97 A (SECURENCY) 16 April 1998 See Abstract and page 4, page 6 line 15-page 7 line 26	1-8,10,11,13-17,19 20,26,27,29-32,37
P,Y	page 6 line 15-page 7 line 16	2,3,10,11,14,15,19
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C <input checked="" type="checkbox"/> See patent family annex		
<p>* Special categories of cited documents:</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&amp;" document member of the same patent family</p>		
Date of the actual completion of the international search 25 February 1999		Date of mailing of the international search report 11 MAR 1999
Name and mailing address of the ISA/AU AUSTRALIAN PATENT OFFICE PO BOX 200 WODEN ACT 2606 AUSTRALIA Facsimile No.: (02) 6285 3929-		Authorized officer  STEPHEN CLARK Telephone No.: (02) 6283 2164

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU 99/00039

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	AU 62634/94 A (DOMTAR) 22 December 1994 See Abstract, page 20 lines 10-17, page 21 lines 24-27	1,4-7,13,17,20, 26,27,29-32,37
Y		2,3,10,11,14,15,19
X	GB 2268906 A (PORTALS) 26 January 1994 See Abstract, page 7	1,4-7,13,17,20, 26,27,29-32,37
Y		2,3,10,11,14,15,19
X	EP 0655316 A (ARJOBEX) 31 May 1995 See Abstract	1,4-7,13,17,20, 26,27,29-32,37
Y		2,3,10,11,14,15,19
X	US5275870 A (HALOPE) 4 January 1994 See whole document	1,4-7,13,17,20, 26,27,29-32,37
Y		2,3,10,11,14,15,19
X	DE 3208204 A (FRAUNHOFER) 15 September 1983 See Abstract	1,4-8,13,17,20, 26,27,29-32,37
Y		2,3,10,11,14,15,19

## INTERNATIONAL SEARCH REPORT

### Information on patent family members

International application No.

PCT/AU 99/00039

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report				Patent Family Member			
AU	87665/82	CA	1272231	GB	2125337	IT	1152046
		NL	8220285	NZ	201691	US	4536016
		WO	83/00659	SE	8305110		
AU	44460/97	WO	98/15418				
AU	62634/94	BG	99482	CA	2102271	CN	1112359
		CZ	9500582	EP	628408	FI	950529
		HU	69674	NO	950375	NZ	262767
		PL	307349	SG	52378	SI	9400249
		SK	289/95	WO	94/29105	ZA	9401001
		HR	940340	US	5449200		
GB	2268906	BR	9306771	EP	650413	FI	950275
		PL	307180	SI	9300395	US	5678863
		WO	94/02329				
EP	655316	US	5536468				
US	5275870	EP	500726	FR	2654386	WO	91/07285
DE	3208204	NONE					





## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup> :</b> <b>B44F 1/12, B41M 3/14, B42D 15/10 //</b> <b>101:00, 115:00, 209:00, 217:00</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 99/37488</b> <b>(43) International Publication Date:</b> 29 July 1999 (29.07.99)
<b>(21) International Application Number:</b> PCT/AU99/00039 <b>(22) International Filing Date:</b> 18 January 1999 (18.01.99)  <b>(30) Priority Data:</b> PP 1427                      21 January 1998 (21.01.98)            AU PP 3632                      21 May 1998 (21.05.98)            AU  <b>(71) Applicant (for all designated States except US):</b> SECURENCY PTY. LTD. [AU/AU]; Hume Highway, Craigieburn, VIC 3064 (AU).  <b>(72) Inventors; and</b> <b>(75) Inventors/Applicants (for US only):</b> ZIENTEK, Paul [AU/AU]; 97 Turner Street, Abbotsford, VIC 3067 (AU). WILSON, Gerard, Joseph [IE/AU]; 763 Brunswick Street North, Fitzroy North, VIC 3065 (AU).  <b>(74) Agent:</b> CARTER SMITH & BEADLE; 2 Railway Parade, P.O. Box 557, Camberwell, Vic 3124 (AU).		<b>(81) Designated States:</b> AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i>
<b>(54) Title:</b> METHOD OF VERIFYING THE AUTHENTICITY OF A SECURITY DOCUMENT AND DOCUMENT FOR USE IN SUCH A METHOD		
<b>(57) Abstract</b> <p>Method of verifying the authenticity of a security document (1), the security document including a first at least partially transparent portion (7, 8) and an optical projection element (9) within or superposed with the first at least partially transparent portion (7, 8), the optical projection element (9) acting to transform a light beam (10a) passing from a light beam source through said first at least partially transparent portion (7, 8) into a patterned beam (11) of selected design, the method including the steps of: positioning the security document such that the light beam is transmitted through the first at least partially transparent portion and the patterned beam is projected onto a viewing surface (14), and verifying the presence of a patterned image by the impingement of the patterned beam on the viewing surface (14).</p> <div data-bbox="812 1197 1380 1953"> </div>		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

## **METHOD OF VERIFYING THE AUTHENTICITY OF A SECURITY DOCUMENT AND DOCUMENT FOR USE IN SUCH A METHOD**

The present invention relates to security documents such as banknotes or the like including security devices for visually verifying the authenticity of the security document, and is particularly concerned with the use of a light source which  
5 interacts with the security device to enable such visual verification.

A wide variety of security devices for security documents, such as banknotes, traveller's cheques, or the like, have been previously proposed. Such security devices are provided in order to make falsification and counterfeiting of the security documents difficult. Amongst those considered to be effective for use in banknotes  
10 and like security documents are security devices which modify the characteristics of an impinging light beam. Such modification is generally detected by a photo-sensitive device which detects the light beam reflected from the security document and, by analyzing the characteristics of the reflected beam, verifies the authenticity  
15 of the security document. According to one known security document verification system, a diffractive device is applied to the surface of a banknote. The output of a laser diode is passed through a lens system to produce a beam of light which is deflected onto the diffractive device on the surface of the banknote. The diffractive device reflects the incident beam to thus generate a diffracted beam. One or more  
20 images are produced by projecting the diffracted beam onto a viewing screen. The characteristics of the diffractive device are chosen so that a preselected image is reflected onto the viewing screen, thus enabling the visual verification of the authenticity of the security document.

Such methods of verification, however, require the use of a complex system  
25 of dedicated laser beam sources, mirrors, lenses and projected image viewing screens. Accordingly, verification of the authenticity of security documents bearing such security devices is only possible by persons possessing the necessary verification equipment, and cannot be conveniently carried out by many retail outlet staff and like persons who wish to verify the authenticity of banknotes, cheques,  
30 traveller's cheques and such documents.

The aim of the invention is to provide a method of verifying the authenticity

of a security document, which method is simple and convenient to use for a large number of persons who would wish to do so.

A further object of the invention is to provide a method of verifying the authenticity of a security document which does not require complex, dedicated  
5 verification equipment.

Another object of the invention is to provide a method of verifying the authenticity of a security document which ameliorates or overcomes problems of known methods of verifying the authenticity of security documents.

With this in mind, one aspect of the present invention provides a method of  
10 verifying the authenticity of a security document, the security document including a first at least partially transparent portion and an optical projection element within or superposed with the first at least partially transparent portion, the optical projection element acting to transform a light beam passing from a light beam source through said first at least partially transparent portion into a patterned beam of  
15 selected design, the method including the steps of:

positioning the security document such that the light beam is transmitted through the first at least partially transparent portion and the patterned beam is projected onto a viewing surface, and

verifying the presence of a patterned image by the impingement of the  
20 patterned beam on the viewing surface.

Preferably, the security document also includes an opacifying portion, the method further including the step of:

folding the security document such that the patterned beam is caused to impinge upon the opacifying portion which thus acts as the viewing surface.

25 Preferably, the opacifying portion of the security document is remote from the first at least partially transparent portion.

Preferably, the light beam source is a directional light beam source. In one embodiment, the light beam source is a point-of-sale light source device, such as a laser or an LED based device.

30 Conveniently, the light beam source may be a bar code scanner.

In one embodiment, the optical projection element acts to generate the

patterned beam by diffraction of the light beam transmitted through the security document.

Advantageously, the security document may include a second at least partially transparent portion, the method further including the step of:

5       folding the security document such that part only of the light beam from the light beam source passes firstly through the second at least partially transparent portion before being transmitted through said first at least partially transparent portion, said second at least partially transparent portion thus acting as a pseudo point light source.

10       In one embodiment of the invention, the security document includes an optical image or device, applied to the opacifying portion, which interacts with the patterned beam impinging on the opacifying portion to create a visual security effect, the method further including the step of:

verifying the presence of the visual security effect.

15       The optical image or device may be, for example, a printed image substantially corresponding to or complementing the patterned image projected onto the viewing surface. In addition, the optical image or device may be a reflective foil OVD or other like device.

Another aspect of the invention provides a security document including a first  
20   at least partially transparent portion and an optical projection element within or superposed with the first at least partially transparent portion, the optical projection element acting to transform a light beam passing from a light beam source through the first at least partially transparent portion into a patterned beam of selected design.

25       Preferably, the security document further includes an opacifying portion for impingement of the patterned beam thereupon.

The opacifying portion and the first at least partially transparent portion are preferably remote from each other.

In one embodiment, the optical projection element acts to generate the  
30   patterned beam by diffraction of the light beam passing through the security document.

In a preferred embodiment of the invention, the security document includes an at least partially transparent substrate having first and second opposing faces, and an opacifying layer applied to at least one of the faces, the first at least partially transparent portion beam applied to leave an uncoated area on the at least one surface.

The security document may include a second at least partially transparent portion for transmitting part only of the light beam from the light beam source, the second at least partially transparent portion thus acting as a pseudo point light source.

In one embodiment of the invention, the security document includes an optical image or device, applied to the opacifying portion, which interacts with the patterned beam impinging on the opacifying portion to create a visual security effect.

A further aspect of the present invention provides a method of producing a security document as described above, including the steps of:

forming an at least partially transparent substrate having first and second opposing surfaces, coating at least one face of the substrate within an opacifying layer, the opacifying layer being applied to leave a first uncoated area on the at least one surface,

conveying the optical projection element into position over the first uncoated area, and

transferring the optical projection element onto the substrate.

In one variant, the optical projection element is conveyed into position over the first uncoated area by and on a transfer foil.

Preferably the optical projection element is transferred from the foil onto the substrate by hot stamping.

It is preferably that at least one optically variable device is also conveyed into position over the first uncoated area and transferred onto the substrate together with the optical projection element.

According to another variant, the optical projection element may be transferred onto or into the substrate by embossing.

In one embodiment of the method of producing a security document, the

opacifying layer is applied to also leave a second uncoated area on the at least one surface, the second uncoated area acting as a pseudo point light source when a light beam passes through the security document in the second uncoated area.

The method of producing a security document may also include the step of:  
5       applying an optical image or device to an opacifying portion of said opacifying layer.

The optical image or device may be applied to the opacifying portion by printing.

The optical image or device may alternatively be a reflective foil OVD or like  
10       device and may be applied to the opacifying layer in the same manner as the optical projection element.

Yet another aspect of the present invention provides a method of verifying the authenticity of a security document, the security document including a first at least partially transparent portion, and an optical projection element within or superposed  
15       with the first at least partially transparent portion, the optical projection element acting to transform a light beam passing from a light beam source through said first at least partially transparent portion into a patterned beam of selected design, the method involving the steps of:

positioning the security document so as to enable a user to look at the light  
20       beam source through the first at least partially transparent portion, and verifying the presence of an image corresponding to the patterned beam in the user's field of vision.

Conveniently, the light beam source may produce substantially collimated light, and this collimated light may be white light.

25       Preferably, the light beam source is located at a sufficiently remote distance from the security document that the light beam passing through the optical projection element is substantially collimated light.

In one embodiment of the invention, the light beam source produces substantially non-collimated light, the method including the step of:

30       placing a screen having a window between the light beam source and the optical projection element, such that the light beam from the light beam source

passing through the window is substantially collimated light.

The screen may be constituted by an opacifying portion of the security document.

5 The window may be constituted by a second at least partially transparent portion of the security document.

Preferably, the first and second at least partially transparent portions are remote from each other in order to enable the window to be conveniently placed between the light beam source and the optical projection element.

10 A further aspect of the invention provides a security document including a first at least partially transparent portion, an optical projection element within or superposed with the first at least partially transparent portion, the optical projection element acting to transform a light beam passing from a light beam source through said first at least partially transparent portion into a patterned beam of selected design, and a second at least partially transparent portion located remotely from the  
15 first at least partially transparent portion, the security document being foldable such that the second at least partially transparent portion is able to be placed between the light beam source and the optical projection element in order that the light beam from the light beam source passing through the second at least partially transparent portion is substantially collimated light.

20 The following description refers in more detail to the various features of the present invention. To facilitate an understanding of the invention, reference is made in the description to the accompanying drawings where the method of verifying the authenticity of a security document, the security document for use in such a method and the method of producing such a security document are illustrated in preferred  
25 embodiments. It is to be understood that the present invention is not limited to the preferred embodiments as illustrated in the drawings.

In the drawings:

FIGURE 1 is a schematic perspective view showing one embodiment of a security document according to the present invention:

30 FIGURE 2 is a cross-sectional side view of the security document of FIGURE 1;



FIGURE 3 is a schematic view of the verification of the authenticity of the security document of FIGURE 1;

FIGURE 4 is a diagrammatic representation of part of the apparatus for transferring an optical projection element from a transfer foil onto the substrate of the security document of FIGURE 1;

FIGURE 5 is a detailed cross-sectional view of the substrate of a variant of the security document, transfer foil and optically variable device for use in the security document;

FIGURE 6 is a schematic view of the verification of the authenticity of a variant of the security document of Figure 1;

FIGURE 7 is a schematic view of the verification of the authenticity of another variant of the security document of figure 1; and

FIGURE 8 is a schematic view of the verification of the authenticity of yet another of the security document of figure 1.

Referring now to FIGURE 1, there is shown a security document 1 comprising an at least partially transparent substrate 2 having first and second opposing faces 3 and 4. Opacifying layers 5 and 6 are respectively applied to the faces 3 and 4 of the substrate 2. The security document 1 may be a banknote comprising a clear plastic substrate having one or more opacifying layers of ink on one or both of its opposing faces. The clear plastics substrate is preferably formed of a transparent polymeric material, such as PE, PP or PET, which may be made up of at least one biaxially oriented polymeric film. The substrate may comprise a single layer of film of polymeric material. Alternatively, the substrate may comprise a laminate of two or more layers of transparent biaxially oriented polymeric film.

The present invention also applies to banknotes and other security documents formed substantially of paper or other non-transparent material. In such a case, an aperture may be formed in the paper and a transparent patch of polymeric material or other transparent film may be applied to the surface of the security document in order to cover the aperture.

The opacifying layers of printed material may comprise one or more of a variety of opacifying inks which can be used in the printing of banknotes or other

security documents. For example, the layers of opacifying ink may comprise pigmented coatings comprising a pigment, such as titanium dioxide, dispersed within a binder or carrier of cross-linkable polymeric material.

As seen in Figure 2, the opacifying layers 5 and 6 are applied to the faces 3 and 4 of the substrate 2 to leave uncoated areas 7 and 8. These areas are superposed so that an at least partially transparent window is formed through the security document. Alternatively, in the case where only one of the faces 3 and 4 of the substrate 2 is covered by an opacifying layer, a single uncoated area may define such a window.

The security document 1 also includes an optical projection element 9 which acts to transform a portion 10a of a light beam 10 from a light beam source through the at least partially transparent portion of the security document (the window created through the security document) into a patterned beam 11 of selected design. The optical projection element may be of the type which acts to generate the patterned beam 11 by diffraction of the light beam 10. One example of such devices are the diffractive optic projection elements or diffusers sold by Mems Optics Pty. Ltd. Such devices are complicated surface microrelief structures similar to diffraction gratings. Whilst the optical transformation of the light beam 10 to the patterned beam 11 is based on the optical principle of diffraction, the mathematics of the structure of such devices is specifically designed in each case to produce a distinct optical transformation in order to produce a desired patterned image when the patterned beam 11 is projected onto a viewing screen. Each diffractive optic projection element is highly dependent on the wavelength of the light beam used.

The transparent windows formed by the superposed uncovered portions 7 and 8 of the security document may be formed in a variety of ways. The opacifying layers 5 and 6 may be coated onto the opposing faces 3 and 4 so as to initially leave these areas uncovered. Alternatively, the opacifying layers 5 and 6 may be applied firstly to the entire surface of the banknote and a laser source or other etching device may be used to remove the opacifying layer from that area. According to one technique, a laser source emits a continuous or pulsed beam of laser light that impinges on and acts on one side of the security document 1. The beam initially

contacts the opacifying layer 6 leading to localized heat build-up in the layer due to the adsorption of radiation by that layer. Eventually the internal bonds and cohesive forces of the layer structure weaken and break down leading to ablation or removal of the particles from the layer 6 in the region of the area 8. The laser beam, having  
5 completely penetrated the layer 6, travels through the transparent substrate 2 substantially unimpeded until it impinges on the surface of layer 5 located on the side of the security document 1. Little or no absorption of the radiation takes places while the beam travels through the substrate 2 and hence little or no heat build-up or consequential damage to the film occurs. When the laser beam 11 impinges on  
10 the layer 5, a similar ablation process occurs whereby particles are removed from the surface thereof in the region of the area 7. This leaves two clear or transparent areas 7 and 8 which are in register on both sides of the substrate 2 and which thus form an at least partially transparent area or window through the security document.

Additionally, the security document 1 may comprise a protective transparent  
15 coating 12 and 13 in order to protect the optical projection element and increase the security document's resistance to wear.

The authenticity of the above described security document may be simply verified without requiring the use of dedicated and complex light emitting and viewing devices. As can be appreciated from FIGURE 2, the placement of the  
20 optical projection element within or superposed with the window through the security document 1 by the uncovered portions 7 and 8 enables the light beam portion 10a to pass from a light beam source through the security document, where it is transformed into a patterned beam of selected design, and projected onto a viewing surface. The authenticity of the security document may be simply verified  
25 by positioning the security document such that the light beam is transmitted through the at least partially transparent portion 7,8 and the patterned beam is projected onto a viewing surface, and then verifying the presence of a patterned image formed by the impingement of the patterned beam on the viewing surface.

Conveniently, the security document 2 also includes a substantially opaque  
30 portion 14 which acts as the viewing surface upon which the pattern beam 11 is projected. As best seen in FIGURE 3, the substantially opaque portion 14 is located

on the security document 1 such that the security document may be folded to bring the substantially opaque portion 14 into the path of the patterned beam 11 projected from the optical projection element 9. This way, the security document 1 provides not only the security device of an optical projection element which transforms light  
5 from a light beam source into a patterned beam of selected design, but also provides a convenient means for verifying the authenticity of the selected design. In order to facilitate the ease with which the substantially opaque portion 14 may be brought into the path of the patterned beam 11, the substantially opaque portion 14 and the at least partially transparent portion 7,8 are remote from each other.

10 In order that the intensity of the light passing through the optical projection element is maximized, and the resulting patterned image made clearer, the light beam source preferably acts to generate a directional light beam, rather than acting as an omnidirectional light source.

As seen in FIGURE 3, the light beam source may conveniently be a point-of-sale light source device 15. A vast number of supermarkets, medium to small businesses and other retail and sales outlets have now introduced Point Of Sale (POS) systems to speed up the check-out of sales and to improve inventory control. Such POS systems rely upon the use of a directional light source to project a beam onto a bar code and a computer to analyse the reflected properties of the light beam.  
20 The use of such a POS light source device in the present invention obviates the need for a dedicated light source for use with the present invention. An operator 16 at a retail point of sale outlet or check-out is therefore able to verify the authenticity of the security document 1 simply by using an existing piece of equipment, that is to say, the POS light source device, either with a separate viewing screen or by  
25 using a substantially opaque portion of the security document 1 as a viewing screen for verifying the authenticity of a patterned image projected by the optical projection element 9.

The POS light source device is preferably a laser based light source, but may also be an LED based device, or other type of light source used in POS systems.  
30 Such POS light sources will commonly be bar code scanning devices.

There will now be described a method of producing a security document

according to the invention. As previously mentioned, the security document 1 may include a layer of at least partially transparent material 2 having opposing faces 3 and 4. At least one face of the substrate 2 is then coated with an opacifying layer. The opacifying layer being applied to leave an uncoated area 7,8 on at least one  
5 surface.

According to the invention, the optical projection element 9 is then conveyed into position over the uncoated area 7 and transferred onto the substrate 2. One manner in which this conveyance and transfer may be carried out is illustrated in FIGURE 4. As seen in this FIGURE, the substrate 2, coated with opacifying layers  
10 5 and 6 except for transparent windows which have been left at intervals corresponding to the locations where the optical projection device will be applied, is fed into an apparatus whereby the optical projection element 9 is conveyed into position of the uncoated area, or window, by and on a transfer foil. In this particular embodiment, the coated substrate 2 is fed between a pair of rollers 20 and  
15 21 together with, and at the same speed, a transfer foil 22. It would be usual for the coated substrate 2 to be fed between the rollers 20 and 21 and a sheet or web, so that a plurality of banknotes or other security documents are printed across its width but, in that case, it can be readily arranged for the transparent windows of the notes in each row to be precisely lined transversely with the sheet or web. Thus, a  
20 separate transfer foil 22 is provided for each note across the width of the sheet.

The upper roll 20 bears on its surface a series of raised pads 23 (see FIGURE 6) in line with each transfer foil 22, the pads 23 being spaced apart by a linear distance corresponding exactly with the longitudinal interval between the windows or uncoated areas 7,8 on the printed notes. Either the entire upper roll 20  
25 or the individual raised pads may be heated so that as they rotate, they press the transfer foil firmly against the coated substrate 2 to effect the transfer of the optical projection element 9 from the surface of the foil onto the sheet by hot stamping.

The optical projection element may also be transferred onto the substrate 2 by embossing, or any other convenient technique.

30 Finally, the printed note or security document in sheet or roll form, bearing the optical projection element, is then subjected to a further coating process in which

the thin coating of protective and transparent material 12,13 is applied to both surfaces of the sheet in order to protect the security document 1 from damage. After this final coating operation, the completed bank notes are separated by guillotining in the conventional fashion.

5 In addition, one or more optically variable devices may also be conveyed into position over the uncoated area 7,8 of the security document 1 and transferred onto the substrate 2 together with the optical projection element 9. As shown in FIGURE 6, the transfer foil 22 may also bear an optically variable device 24, such as a reflective diffraction grating, moire grating, etc.

10 Turning now to Figure 6, there is shown a method of verifying the authenticity of a first variant of the security document 1. The security document 30, in addition to the first at least partially transparent portion 7, 8 and optical projection element 9, also includes a second at least partially transparent portion 31. This second at least partially transparent portion 31 may be created in the same manner  
15 as first partially transparent portion 7, 8. The dimensions of the second transparent portion 31 are such as to allow the transmission of only a portion 10a of the light beam 10 from the light beam source 15 through the security document 30 and onto the optical projection element 9. In this way, the second transparent portion 31 acts as a pseudo point light source and avoids the transmission of other portions of the  
20 light beam 10 through the first transparent portion 7, 8 onto the viewing surface 14. The transmission of such additionally portions of the light beam 10 may interfere with the verification of the authenticity of the security document by creating undesirable optical effects with either the patterned beam or the opacifying surface of the security document.

25 When in use, and as shown in Figure 6, the security document 30 may be folded so that the light beam portion 10a only of the light beam 10 from the light beam source passes firstly through the second at least partially transparent portion 31 before being transmitted through the first at least partially transparent portion 7, 8. As was the case in Figure 3, the projected beam 11 may either be caused to  
30 impinge upon a separate viewing surface or upon an opacifying portion of the security document 30 which acts as such a viewing surface.

The second at least partially transparent portion 31 may be formed in the same manner as the first transparent portion 7, 8. Accordingly, when the opacifying layer or layers 5, 6 are applied to the transparent substrate 2, in addition to a first uncoated area being left, a second uncoated area may also be left.

5        Moreover, the security document may include an optical image or device which is applied to the opacifying portion in the region of the viewing surface 14. Such an optical image or device would interact with the patterned beam impinging on the viewing surface to create a visual security effect. For example, the optical image or device may be a printed image substantially corresponding to or  
10        complimenting the patterned image projected onto the viewing surface. By way of example, the patterned image may be the characters "\$20", and the optical image or device may be constituted by the same "\$20" characters, printed onto the surface of the opacifying portion so that the patterned image and the optical image or device are superimposed. Alternatively, for example, the patterned image and the optical  
15        image or device may be complimentary, so that the patterned image may comprise the characters "\$ 0" whilst the optical image or device comprises the character "2".

      The optical image or device may also comprise a reflective foil OVD or other like device which interferes with the patterned beam projected onto the viewing surface. Such a device may be applied to the opacifying layer in the same manner  
20        as the optical projection element, as described above.

      Figure 7 shows a method of verifying the authenticity of another variant of the security document. The security document 40, includes, as described previously, a first at least partially transparent portion 7,8 and optical projection element 9. It has been observed, by the present applicants, that if the security document 40 is  
25        positioned so as to enable a user 41 to look at the light beam source 42 through the first at least partially transparent portion 7,8, that a patterned image corresponding to the patterned beam will appear in the user's field of vision, at a point between the light source and the security document. Diffractive optical projection elements normally intended for use with red LED or other monochromatic light have been  
30        found to produce such "virtual" verification images even when using a white light source. Preferably, the light source 42 produces substantially collimated light. In

order to achieve this, the light beam source 42 may be located at a sufficiently remote distance from the security document that the light beam 43 passing through the optical projection element 9 is substantially collimated light.

In yet another embodiment of the invention, as shown in Figure 8, the security document, here referenced 50, may also include a second at least partially transparent portion 51, constituting a window or pinhole through a surrounding opacifying portion 52. Accordingly, a screen is created having a small window therethrough. This screen may be placed between a light source 53 and the optical projection element 9 such that the light beam 54 passing through the window 51 is caused to be substantially collimated light. In this way, the light source 53 may be constituted by a point source of light, including white light, such as a conventional household light globe from a desk lamp or down light, or a car headlight or variety of other light globes. Conveniently, the first and second at least partially transparent portions 50 and 51 are located remote from each other in order to enable the convenient placing of the screen 52 and window 51 in the path of the light beam 54.

As above, it has been observed that, in this arrangement, a user is able to look at the light beam source 53 through the first at least partially transparent portion and to observe the presence of a patterned image 55 corresponding to the pattern beam projected onto the user's eye 56, this virtual image appearing between the security document 50 and the source of light 53.

Finally, it is to be understood that various modifications and/or additions may be made to the security document, method of verifying the authenticity of a security document and method of producing a security document without departing from the ambit of the present invention.

In particular, the present invention may be used to generate color-separated images for verification of the authenticity of the security document. In embodiments of the invention using non-monochromatic light, such as white light, diffractive optical project elements may be used which diffract different colors within the light beam passing through the security document in different ways. For example, a diffractive optical element may be used which acts that part of the image used to verify the authenticity of the security document appears in one color (e.g. red) whilst



another part of the image appears in another color (e.g. blue). The verification image would thus appear as a number of discrete, spatially separated elements each of which is a different color.

**Claims**

1. Method of verifying the authenticity of a security document, the security document including a first at least partially transparent portion and an optical projection element within or superposed with the first at least partially transparent  
5 portion, the optical projection element acting to transform a light beam passing from a light beam source through said first at least partially transparent portion into a patterned beam of selected design, the method including the steps of:  
    positioning the security document such that the light beam is transmitted through the first at least partially transparent portion and the patterned beam is  
10 projected onto a viewing surface, and  
    verifying the presence of a patterned image by the impingement of the patterned beam on the viewing surface.
2. Method according to claim 1, wherein the security document includes an opacifying portion, the method further including the step of:  
15 folding the security document such that the patterned beam is caused to impinge upon the opacifying portion which thus acts as the viewing surface.
3. Method according to claim 2, wherein the opacifying portion of the security document is remote from the first at least partially transparent portion.
4. Method according to any one of the preceding claims, wherein the light beam  
20 source is a directional light beam source.
5. Method according to claim 4, wherein the light beam source is a point-of-sale light source device.
6. Method according to claim 5, wherein the point-of-sale light source device is a laser or an LED based device.
- 25 7. Method according to claim 6, wherein the light beam source is a bar code scanner.
8. Method according to any one of the preceding claims, wherein the optical projection element acts to generate the patterned beam by diffraction of the light beam transmitted through the security document.
- 30 9. Method according to any one of the preceding claims, wherein the security document includes a second at least partially transparent portion, the method further

including the step of:

folding the security document such that part only of the light beam from the light beam source passes firstly through the second at least partially transparent portion before being transmitted through said first at least partially transparent  
5 portion, said second at least partially transparent portion thus acting as a pseudo point light source.

10. Method according to any one of the preceding claims, wherein the security document includes an optical image or device, applied to the opacifying portion, which interacts with the patterned beam impinging on the opacifying portion to  
10 create a visual security effect, the method further including the step of:

verifying the presence of the visual security effect.

11. Method according to claim 10, wherein optical image or device is a printed image substantially corresponding to or complementing the patterned image projected onto the viewing surface.

15 12. Method according to either of claims 11 or 12, wherein the optical image or device is a reflective foil OVD or other like device.

13. Security document including a first at least partially transparent portion and an optical projection element within or superposed with the first at least partially transparent portion, the optical projection element acting to transform a light beam  
20 passing from a light beam source through the first at least partially transparent portion into a patterned beam of selected design.

14. Security document according to claim 13, and further including an opacifying portion for impingement of the patterned beam thereupon.

15. Security document according to claim 14, wherein the opacifying portion and  
25 the first at least partially transparent portion are remote from each other.

16. Security document according to anyone of claims 13 to 15, wherein the optical projection element acts to generate the patterned beam by diffraction of the light beam passing through the security document.

17. Security document according to any one of claims 13 to 16, and including an  
30 at least partially transparent substrate having first and second opposing faces, and an opacifying layer applied to at least one of the faces, the first at least partially

transparent portion being applied to leave an uncoated area on the at least one surface.

18. Security document according to any one of claims 13 to 17, and further including a second at least partially transparent portion for transmitting part only of the light beam from the light beam source, the second at least partially transparent portion thus acting as a pseudo point light source.

19. Security document according to any one of claims 13 to 18, wherein the security document includes an optical image or device, applied to the opacifying portion, which interacts with the patterned beam impinging on the opacifying portion to create a visual security effect.

20. Method of producing a security document as described above, including the steps of:

forming an at least partially transparent substrate having first and second opposing surfaces, coating at least one face of the substrate within an opacifying layer, the opacifying layer being applied to leave a first uncoated area on the at least one surface,

conveying the optical projection element into position over the first uncoated area, and

transferring the optical projection element onto the substrate.

21. Method according to claim 20, wherein the optical projection element is conveyed into position over the first uncoated area by and on a transfer foil.

22. Method according to claim 20, wherein the optical projection element is transferred from the foil onto the substrate by hot stamping.

23. Method according to any one of claims 20 to 22, wherein at least one optically variable device is conveyed into position over the first uncoated area and transferred onto the substrate together with the optical projection element.

24. Method according to claim 20, wherein the optical projection element may be transferred onto or into the substrate by embossing.

25. Method according to any of claims 20 to 24, wherein the opacifying layer is applied to also leave a second uncoated area on the at least one surface, the second uncoated area acting as a pseudo point light source when a light beam passes

through the security document in the second uncoated area.

26. Method according to any one of claims 20 to 25, and further including the step of:

5       applying an optical image or device to an opacifying portion of said opacifying layer.

27. Method according to claim 26, wherein the optical image or device is applied to the opacifying portion by printing.

28. Method according to claim 26, wherein the optical image or device is a reflective foil OVD or like device.

10   29. Method of verifying the authenticity of a security document, the security document including a first at least partially transparent portion, and an optical projection element within or superposed with the first at least partially transparent portion, the optical projection element acting to transform a light beam passing from a light beam source through said first at least partially transparent portion into a  
15   patterned beam of selected design, the method involving the steps of:

      positioning the security document so as to enable a user to look at the light beam source through the first at least partially transparent portion, and verifying the presence of an image corresponding to the patterned beam in the user's field of vision.

20   30. Method according to claim 29, wherein the light beam source produces substantially collimated light.

31. Method according to claim 30, wherein the collimated light is white light.

32. Method according to any one of claims 29 to 31, wherein the light beam source is located at a sufficiently remote distance from the security document that  
25   the light beam passing through the optical projection element is substantially collimated light.

33. Method according to claim 29, wherein the light beam source produces substantially non-collimated light, the method including the step of:

      placing a screen having a window between the light beam source and the  
30   optical projection element, such that the light beam from the light beam source passing through the window is substantially collimated light.

34. Method according to claim 33, wherein the screen is constituted by an opacifying portion of the security document.

35. Method according to either of claims 33 or 34, wherein the window is constituted by a second at least partially transparent portion of the security document.

36. Method according to claim 35, wherein the first and second at least partially transparent portions are remote from each other in order to enable the window to be conveniently placed between the light beam source and the optical projection element.

10 37. Security document including a first at least partially transparent portion, an optical projection element within or superposed with the first at least partially transparent portion, the optical projection element acting to transform a light beam passing from a light beam source through said first at least partially transparent portion into a patterned beam of selected design, and a second at least partially transparent portion located remotely from the first at least partially transparent portion, the security document being foldable such that the second at least partially transparent portion is able to be placed between the light beam source and the optical projection element in order that the light beam from the light beam source passing through the second at least partially transparent portion is substantially collimated light.

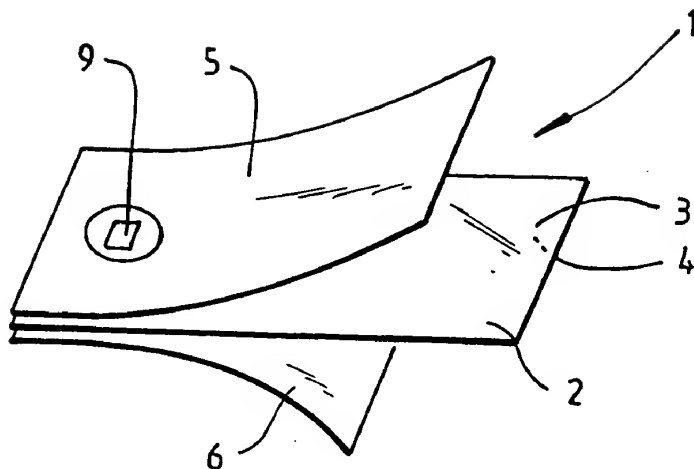


FIG. 1.




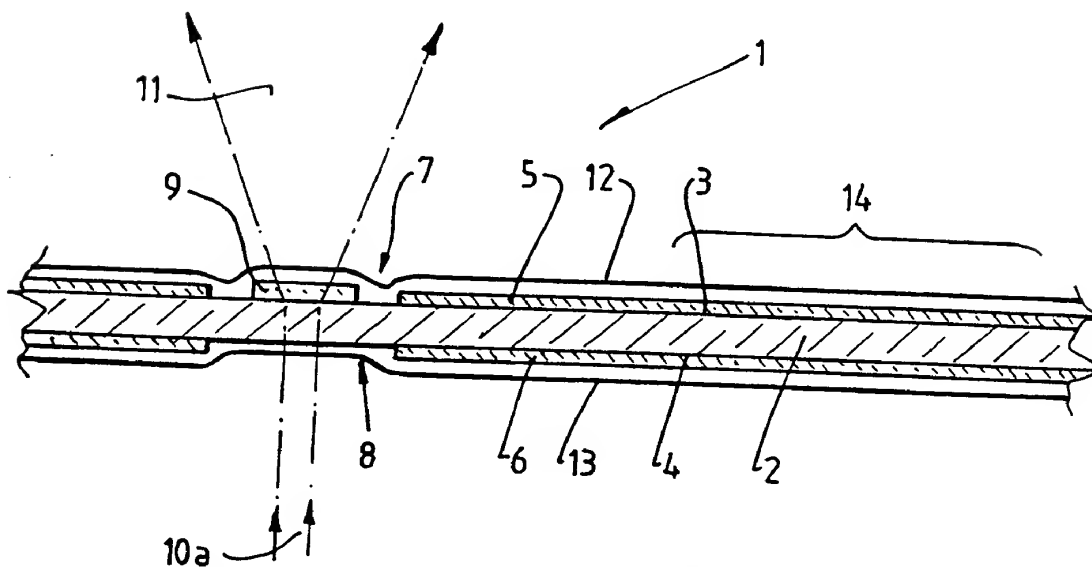


FIG. 2.

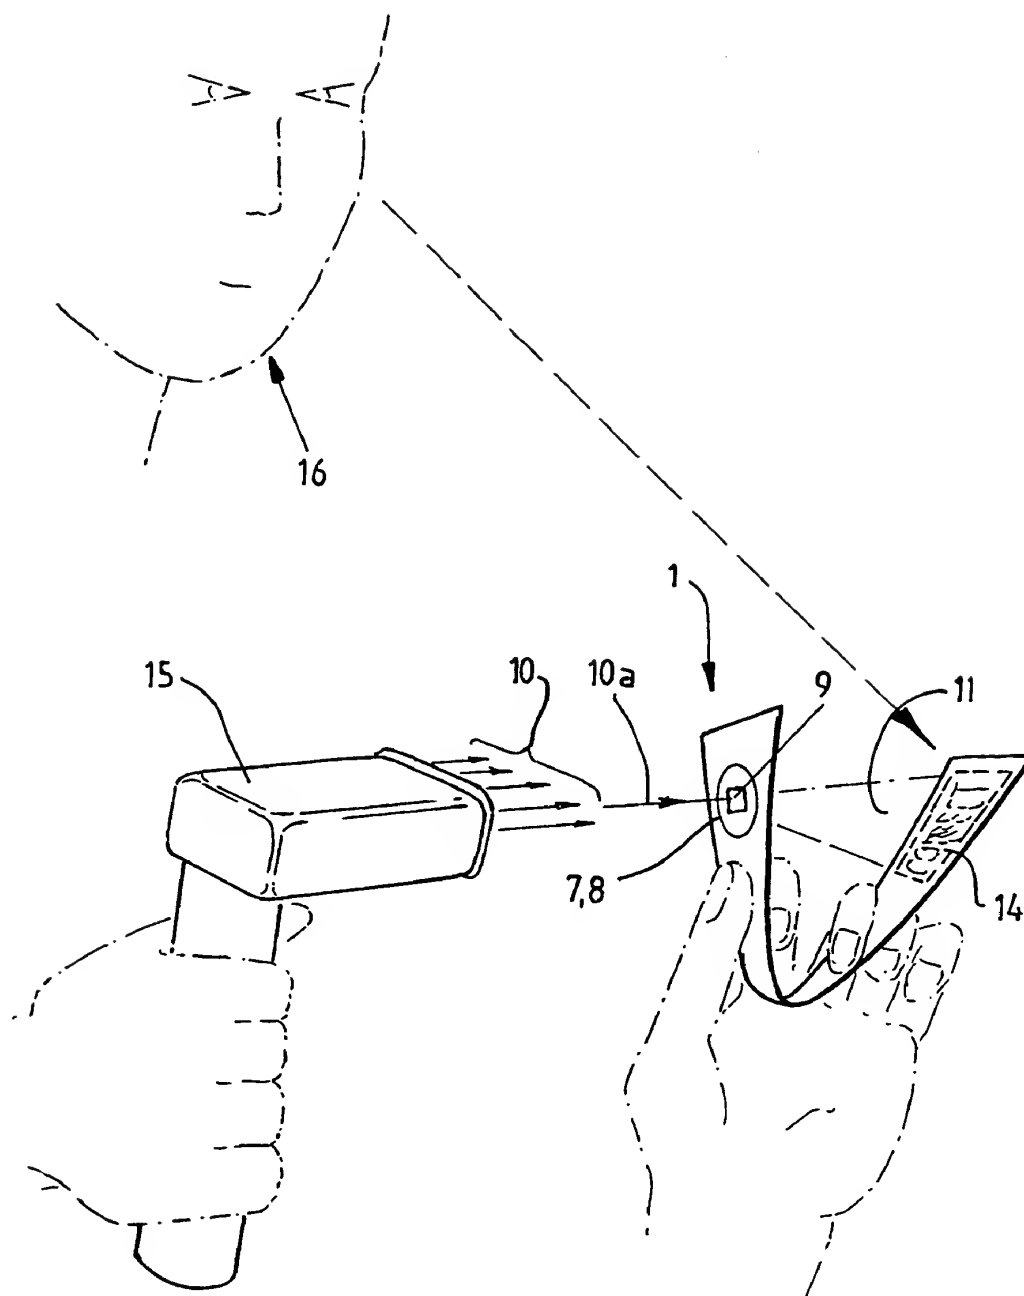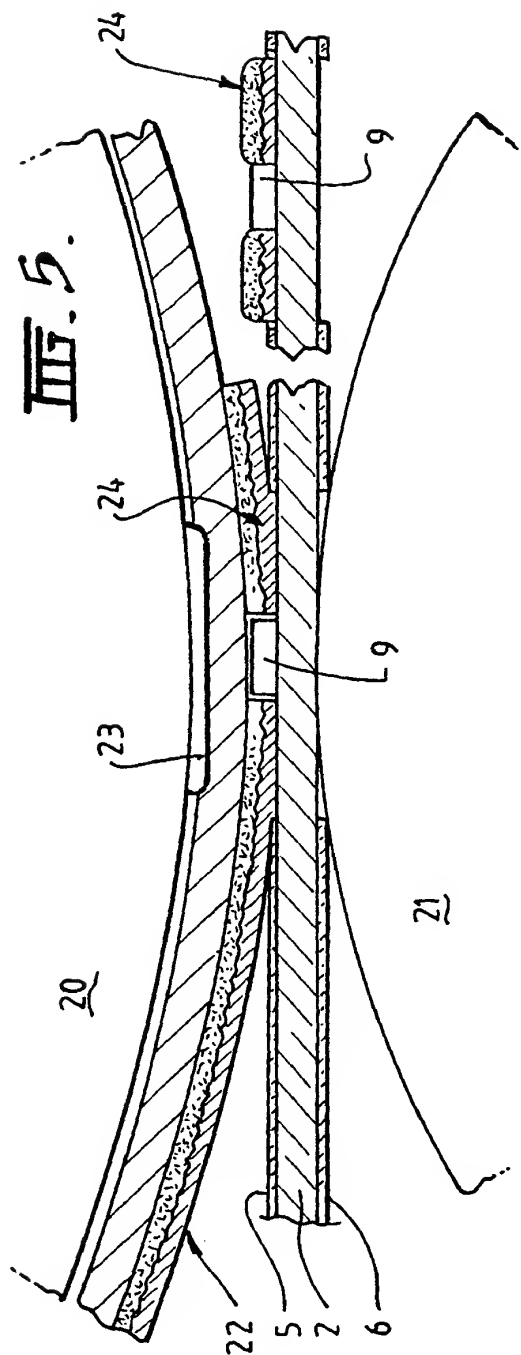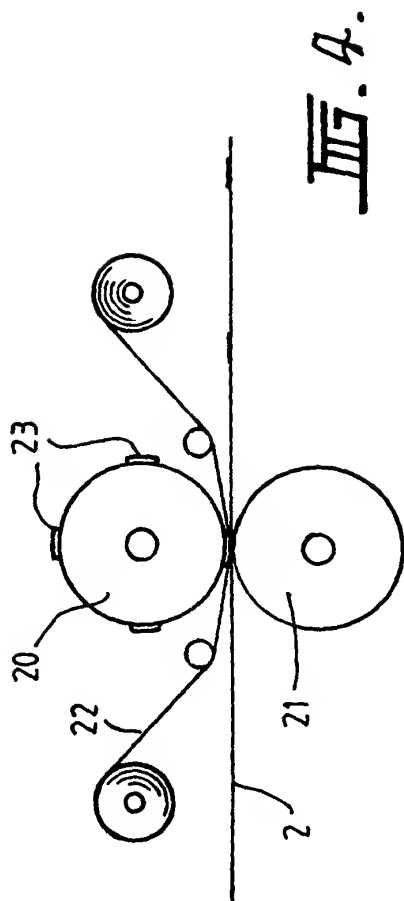

III 3.







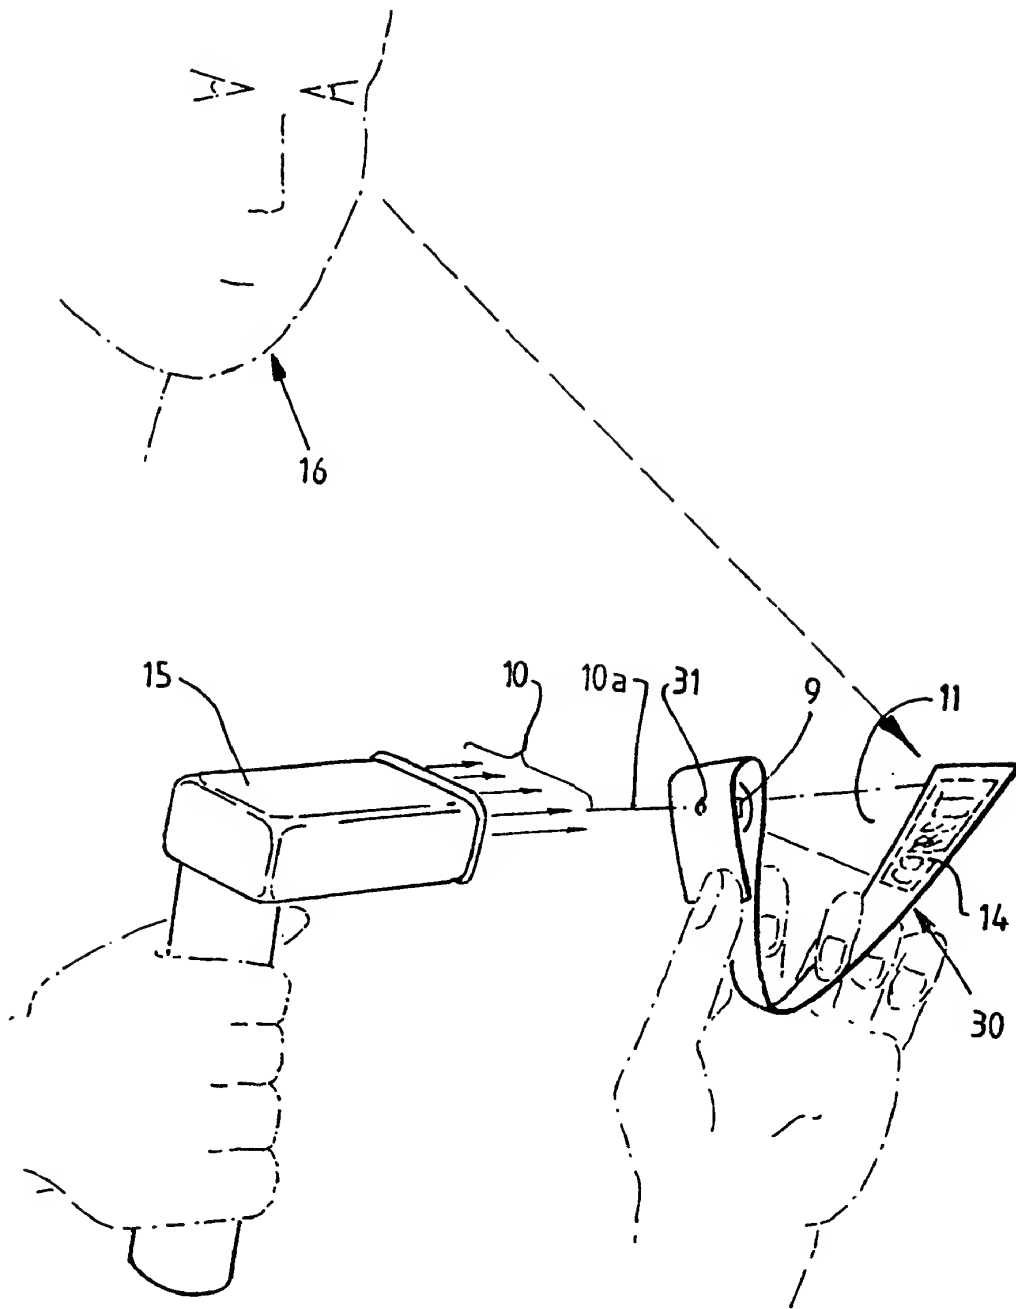


FIG. 6

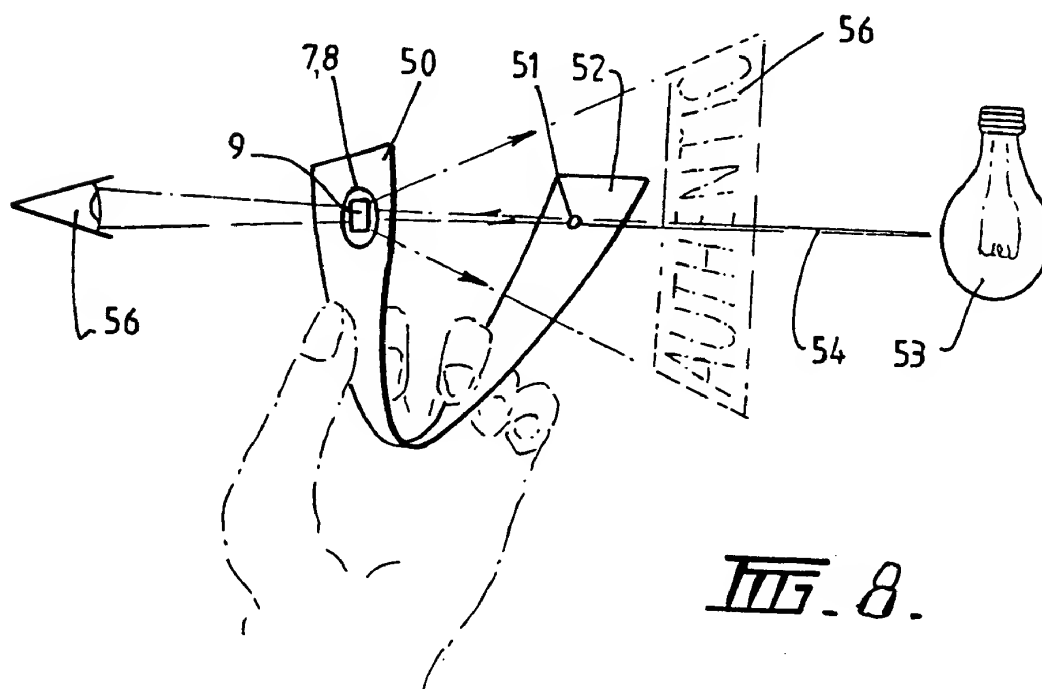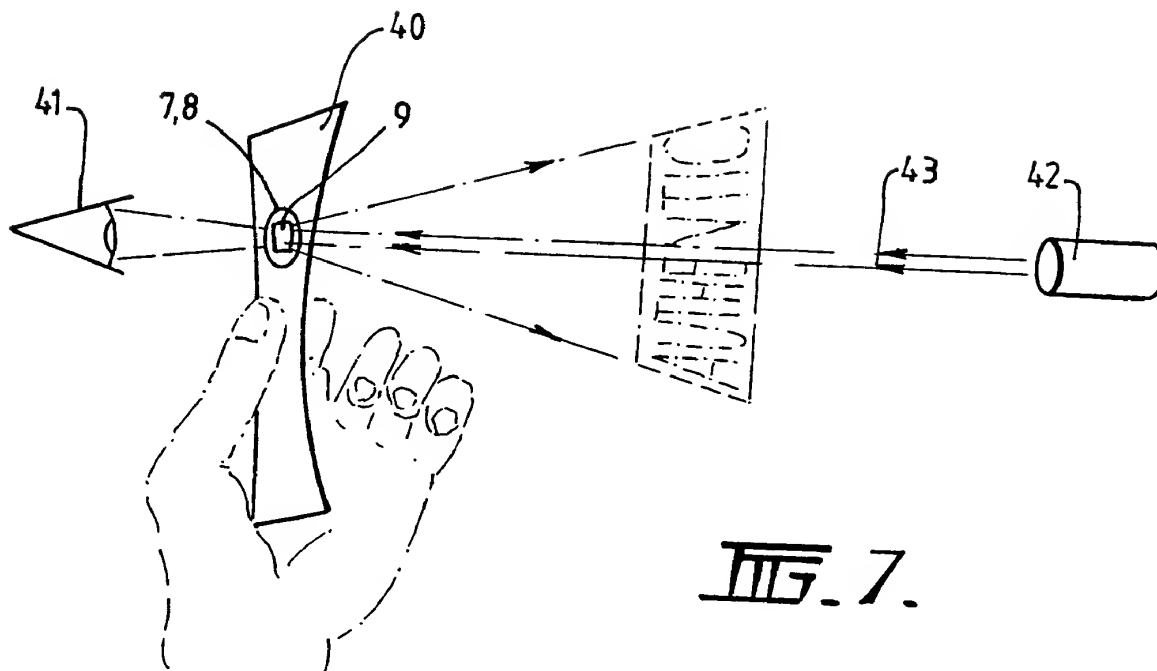

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/AU 99/00039

<b>A. CLASSIFICATION OF SUBJECT MATTER</b>		
Int Cl <sup>6</sup> : B44F 1/12, B41M 3/14, B42D 15/10 // B42D 101:00, 115:00, 209:00, 217:00		
According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b>		
Minimum documentation searched (classification system followed by classification symbols) B44F 1/12, B41M 3/10, 3/14, B42D 15/10, 101:00, 115:00, 209:00, 217:00, 219:00, 221:00, 223:00, G06K 5/00, 9/00, G07D 7/00		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) WPAT, JAPIO (TRANSPARENT, TRANSLUCENT, CLEAR, TRANSMIT, SECUR, DOCUMENT#, BANK, CHEQUE#, CHECK#, MONEY, WATERMARK, PATTERN, IMAG, VERIF, AUTHENTIC, FOLD, BOND)		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	AU 87665/82 A (CSIRO) 3 March 1983 See disclosure of invention pages 2-6	1,4-8,13,16,17,20-22,26,27,29-32,37
Y		2,3,10,11,14,15,19
P,X	AU 44460/97 A (SECURENCY) 16 April 1998 See Abstract and page 4, page 6 line 15-page 7 line 26	1-8,10,11,13-17,19 20,26,27,29-32,37
P,Y	page 6 line 15-page 7 line 16	2,3,10,11,14,15,19
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C <input checked="" type="checkbox"/> See patent family annex		
<p>* Special categories of cited documents:</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&amp;" document member of the same patent family</p>		
Date of the actual completion of the international search 25 February 1999		Date of mailing of the international search report 11 MAR 1999
Name and mailing address of the ISA/AU AUSTRALIAN PATENT OFFICE PO BOX 200 WODEN ACT 2606 AUSTRALIA Facsimile No.: (02) 6285 3929-		Authorized officer  STEPHEN CLARK Telephone No.: (02) 6283 2164

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU 99/00039

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	AU 62634/94 A (DOMTAR) 22 December 1994 See Abstract, page 20 lines 10-17, page 21 lines 24-27	1,4-7,13,17,20, 26,27,29-32,37
Y		2,3,10,11,14,15,19
X	GB 2268906 A (PORTALS) 26 January 1994 See Abstract, page 7	1,4-7,13,17,20, 26,27,29-32,37
Y		2,3,10,11,14,15,19
X	EP 0655316 A (ARJOBEX) 31 May 1995 See Abstract	1,4-7,13,17,20, 26,27,29-32,37
Y		2,3,10,11,14,15,19
X	US5275870 A (HALOPE) 4 January 1994 See whole document	1,4-7,13,17,20, 26,27,29-32,37
Y		2,3,10,11,14,15,19
X	DE 3208204 A (FRAUNHOFER) 15 September 1983 See Abstract	1,4-8,13,17,20, 26,27,29-32,37
Y		2,3,10,11,14,15,19

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.  
PCT/AU 99/00039

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report				Patent Family Member			
AU	87665/82	CA	1272231	GB	2125337	IT	1152046
		NL	8220285	NZ	201691	US	4536016
		WO	83/00659	SE	8305110		
AU	44460/97	WO	98/15418				
AU	62634/94	BG	99482	CA	2102271	CN	1112359
		CZ	9500582	EP	628408	FI	950529
		HU	69674	NO	950375	NZ	262767
		PL	307349	SG	52378	SI	9400249
		SK	289/95	WO	94/29105	ZA	9401001
		HR	940340	US	5449200		
GB	2268906	BR	9306771	EP	650413	FI	950275
		PL	307180	SI	9300395	US	5678863
		WO	94/02329				
EP	655316	US	5536468				
US	5275870	EP	500726	FR	2654386	WO	91/07285
DE	3208204	NONE					
END OF ANNEX							